
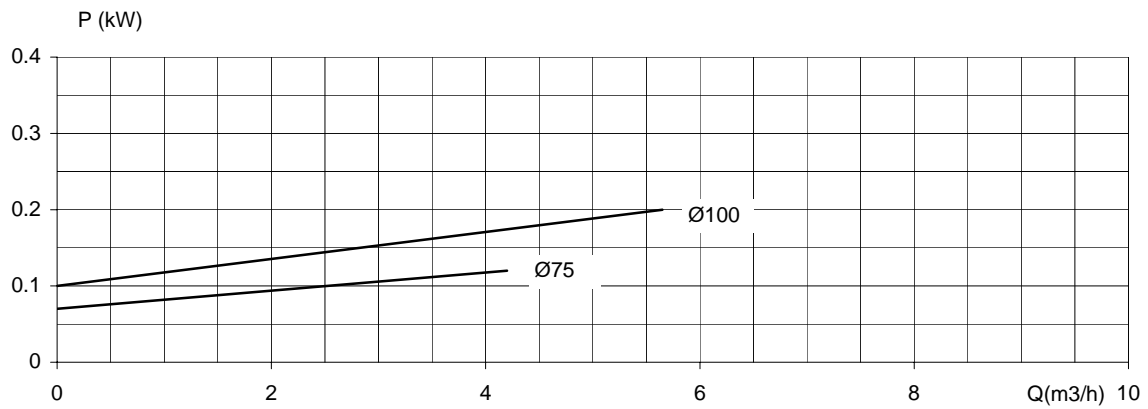


Model TRA 500LE - 1450 RPM
40 mm Inlet x 40 mm Outlet


WRIGHT PUMP

H (m)

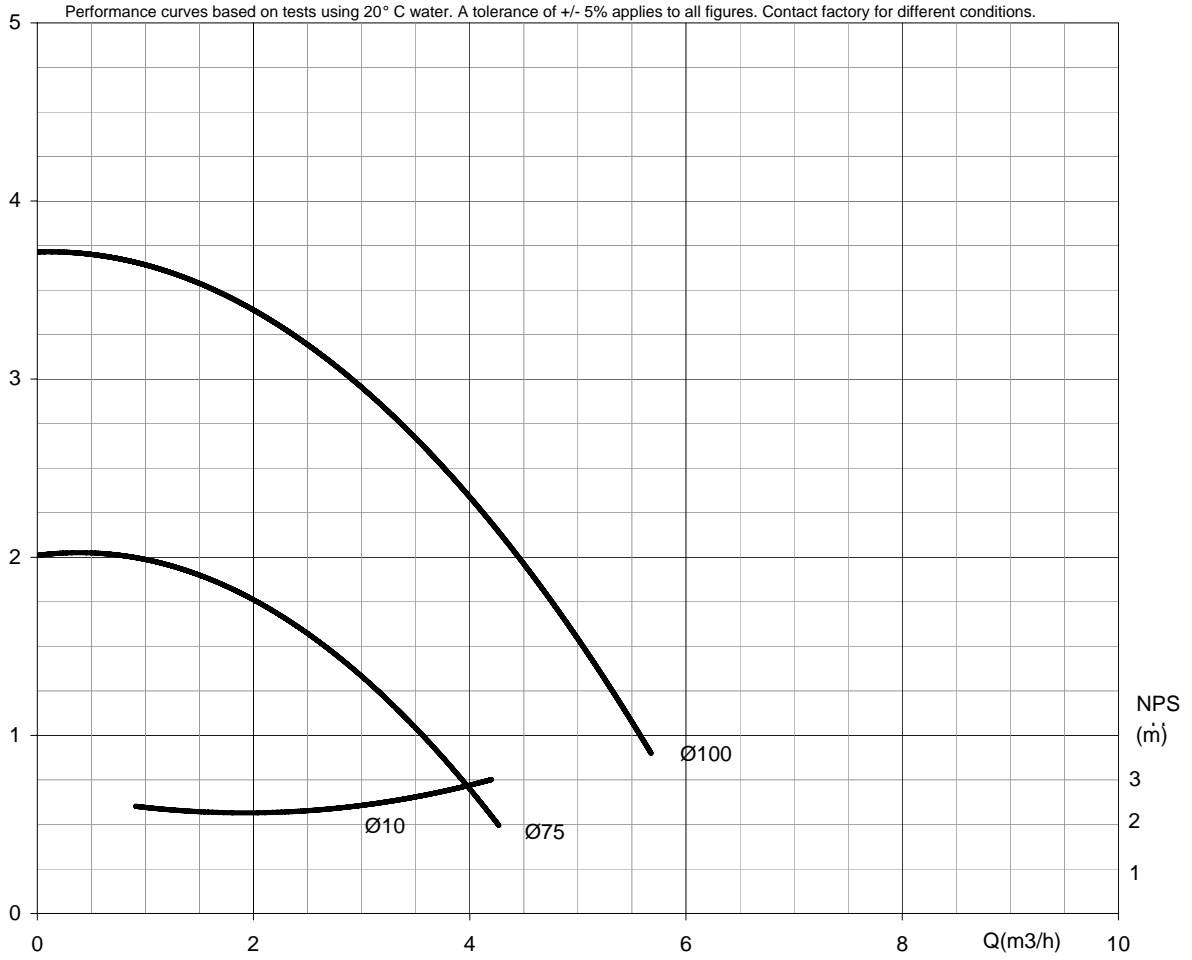


Model TRA 501LE - 1450 RPM *WRIGHT PUMP*
50 mm Inlet x 40 mm Outlet

H (m)

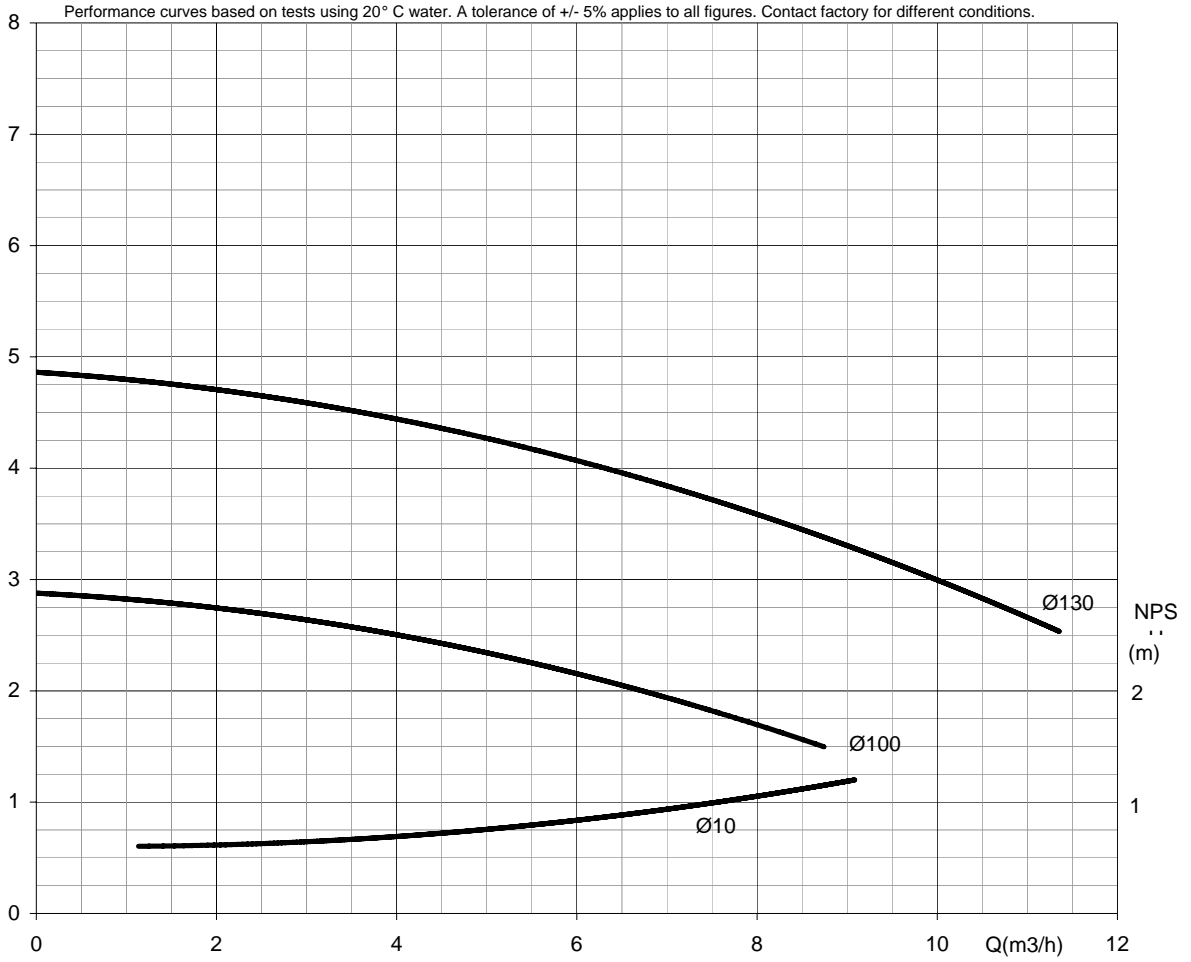


P (kW)

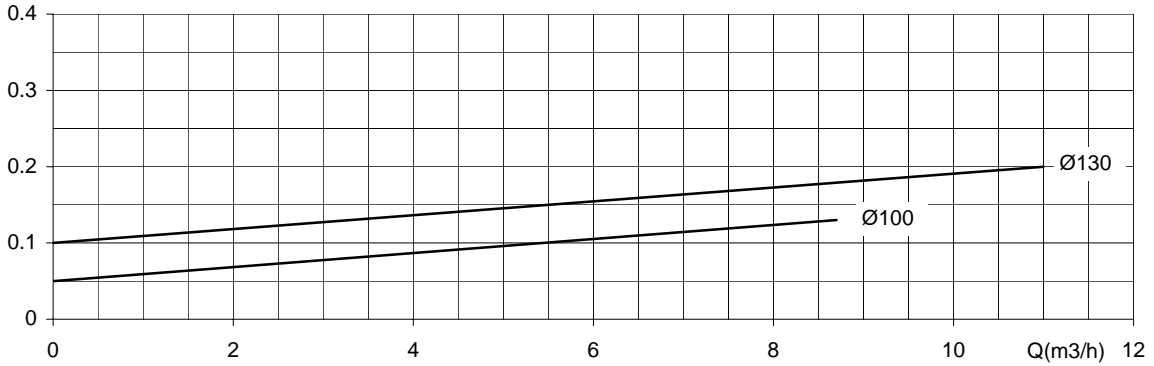


Model TRA 502LE - 1450 RPM
50 mm Inlet x 40 mm Outlet

WRIGHT PUMP

H (m)

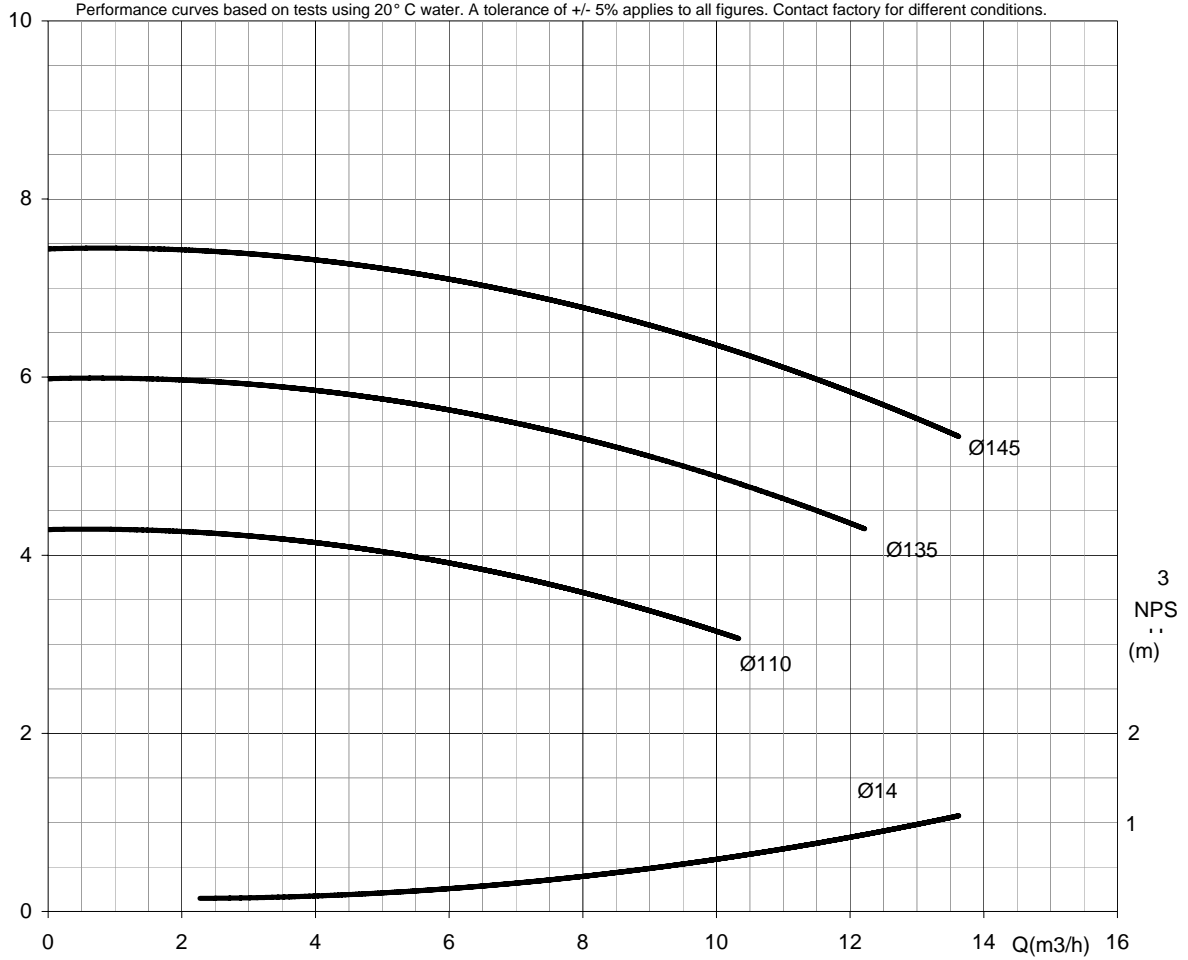


P (kW)

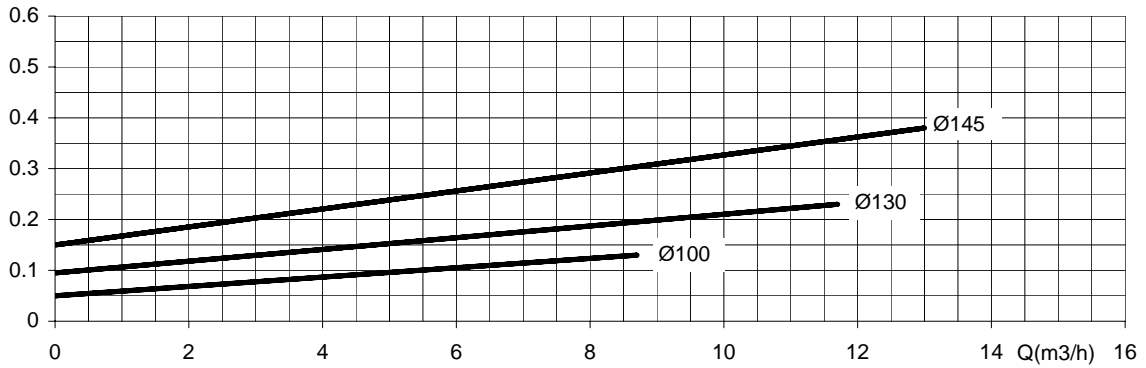

Model TRA 503LE - 1450 RPM
50 mm Inlet x 40 mm Outlet


WRIGHT PUMP

H (m)

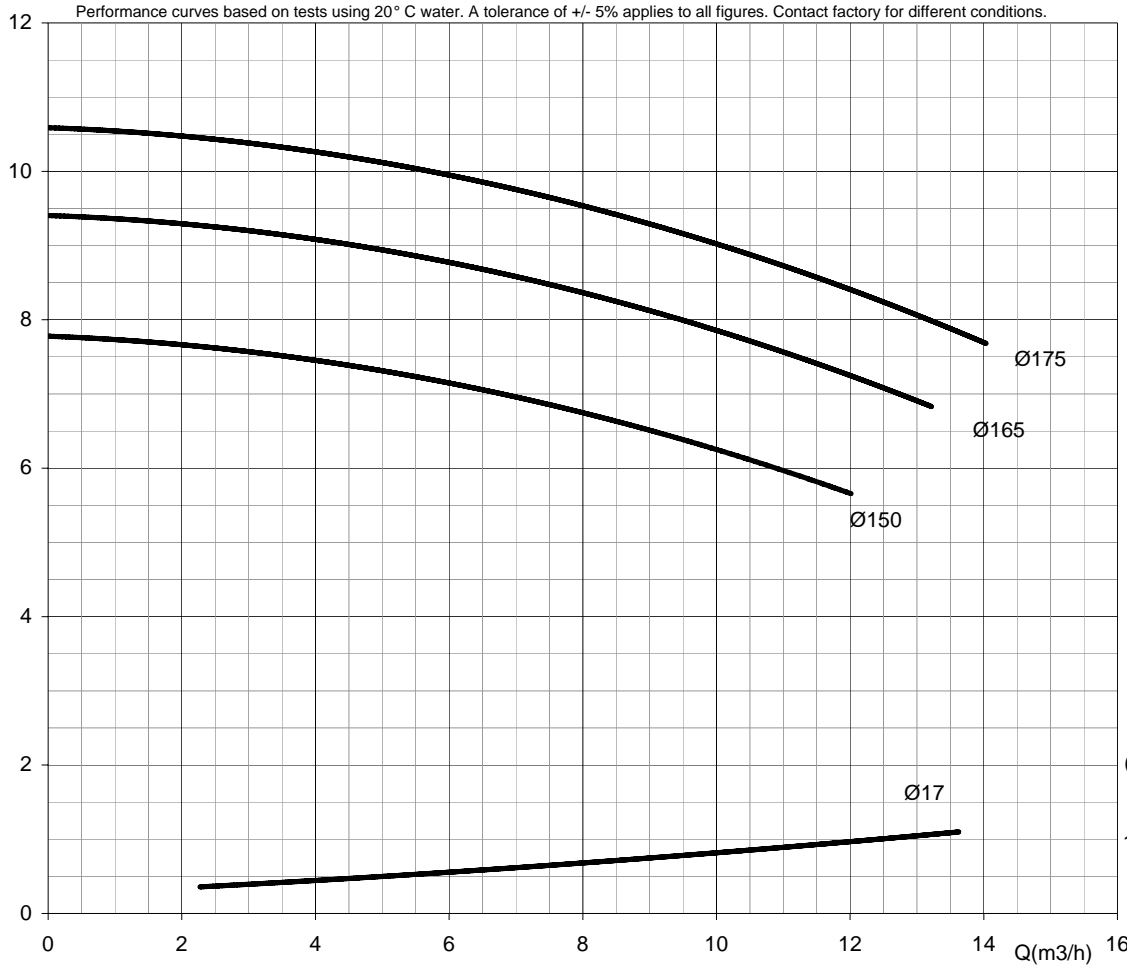

NPS (m)
 2
 1

P (kW)

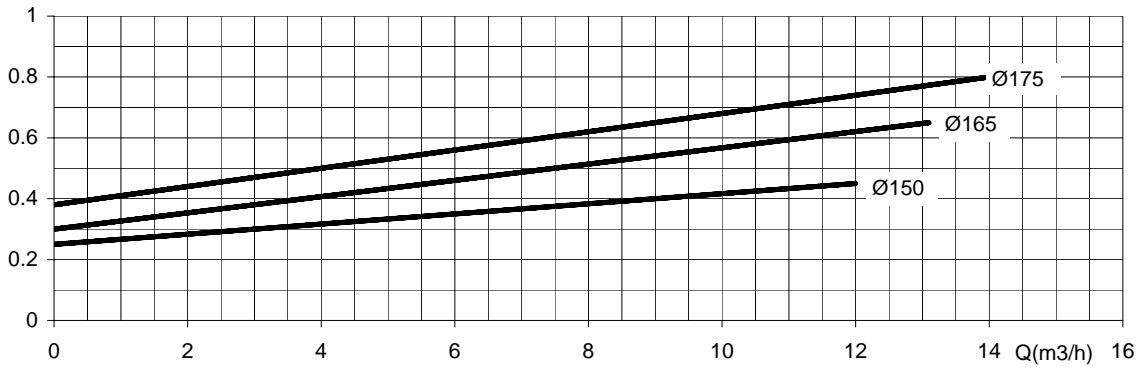


Model TRA 505LE- 1450 RPM
65 mm Inlet x 50 mm Outlet

WRIGHT PUMP

H (m)




P (kW)

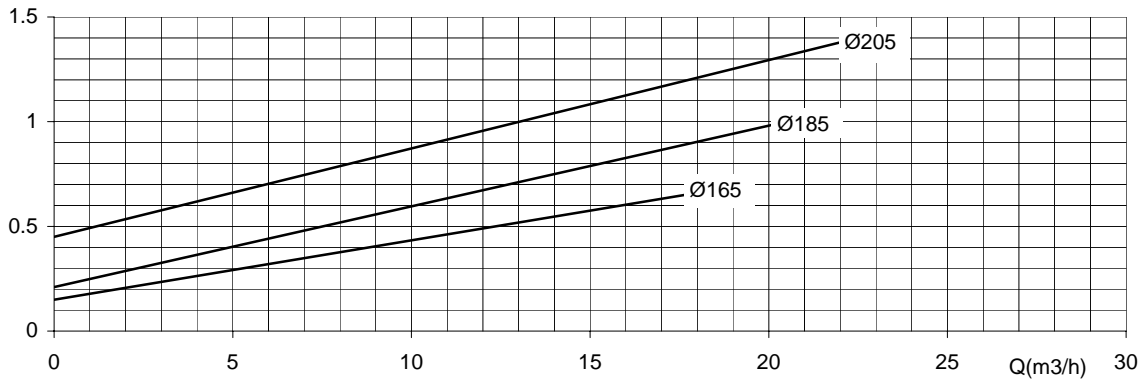


Model TRA 506LE- 1450 RPM
65 mm Inlet x 50 mm Outlet

WRIGHT PUMP

H (m)

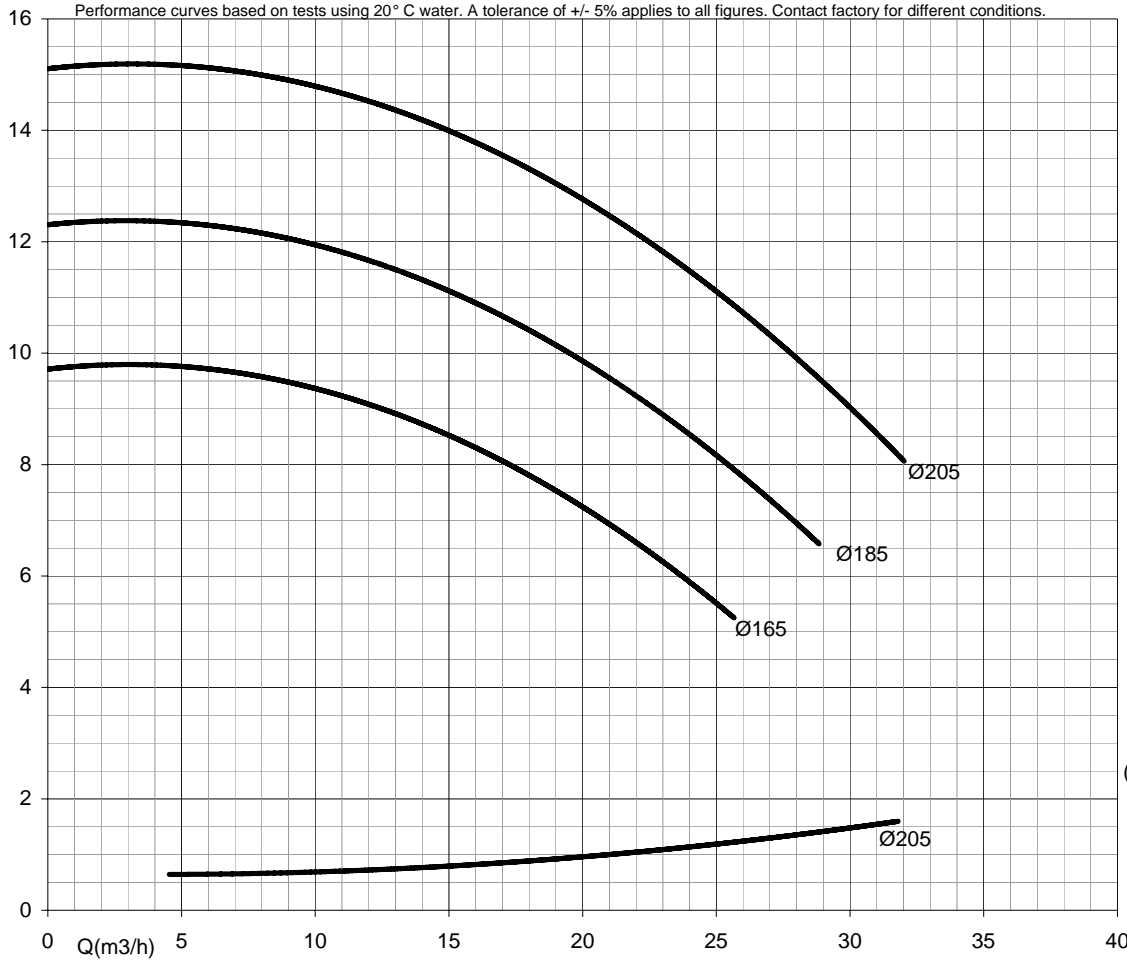

NPS
(m)

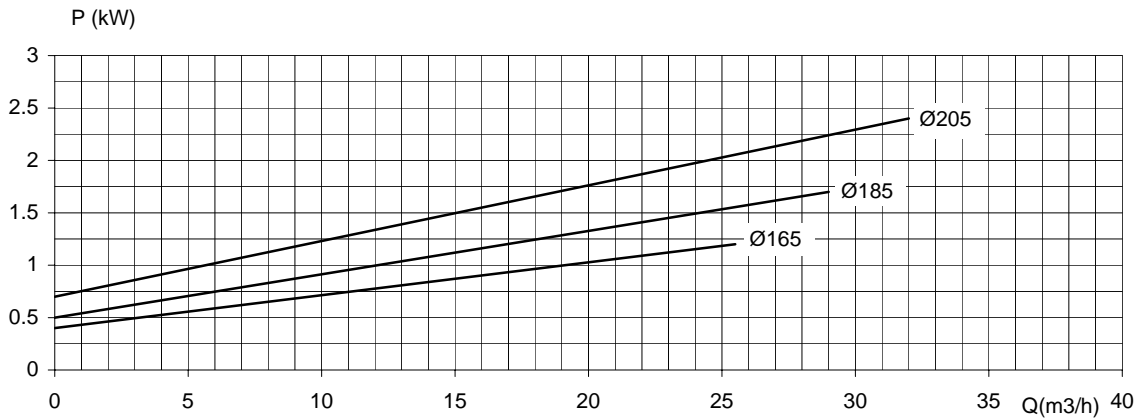


Model TRA 552LE - 1450 RPM
65 mm Inlet x 50 mm Outlet


WRIGHT PUMP

H (m)

Performance curves based on tests using 21° C water. A tolerance of +/- 5% applies to all figures. Contact factory for different conditions.

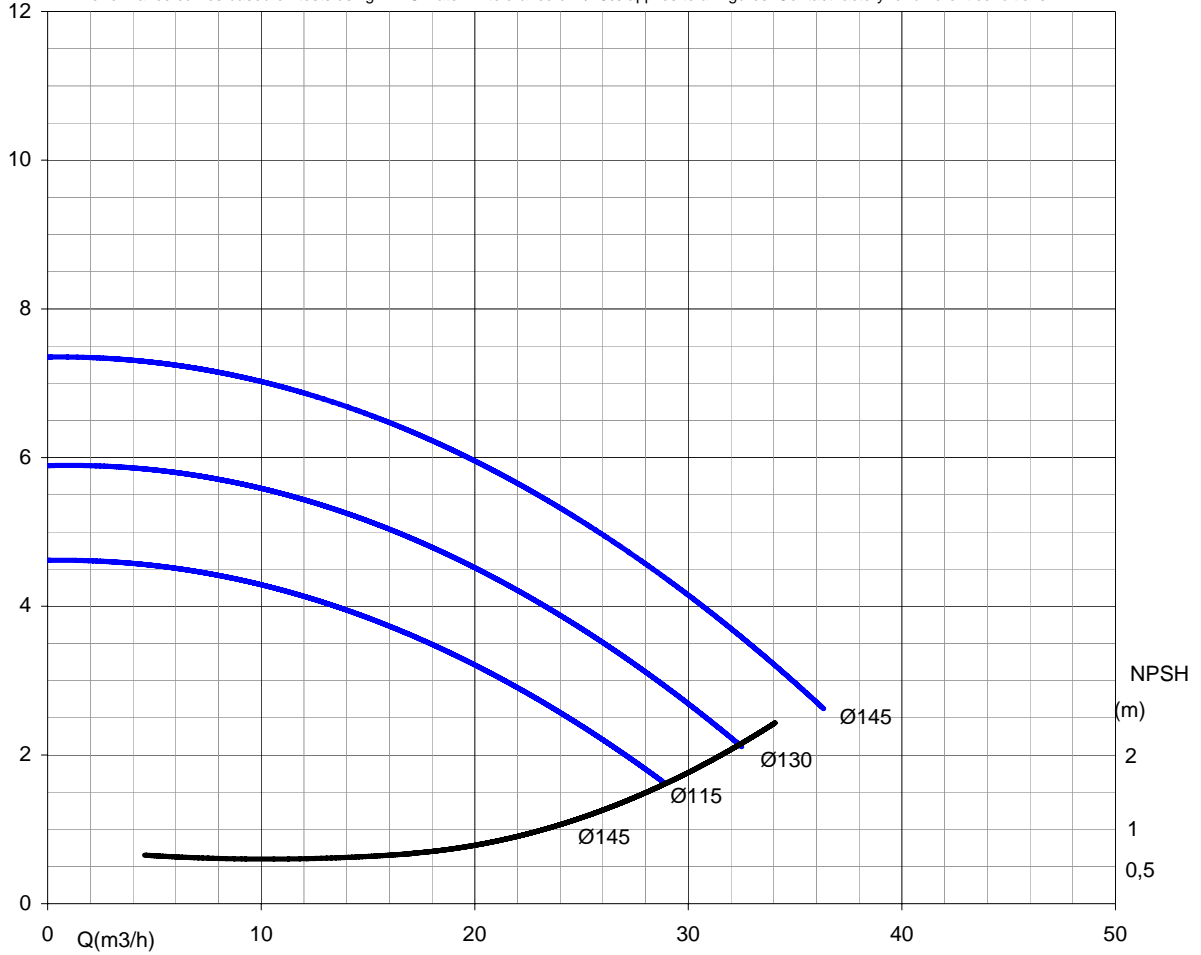

P (kW)

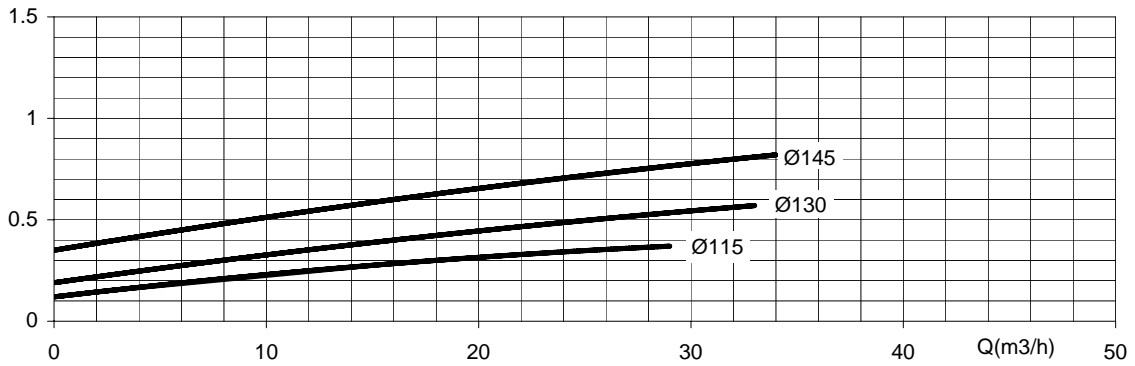


Model TRA 553LE - 1450 RPM
65 mm Inlet x 50 mm Outlet


WRIGHT PUMP

H (m)

Performance curves based on tests using 20° C water. A tolerance of +/- 5% applies to all figures. Contact factory for different conditions.

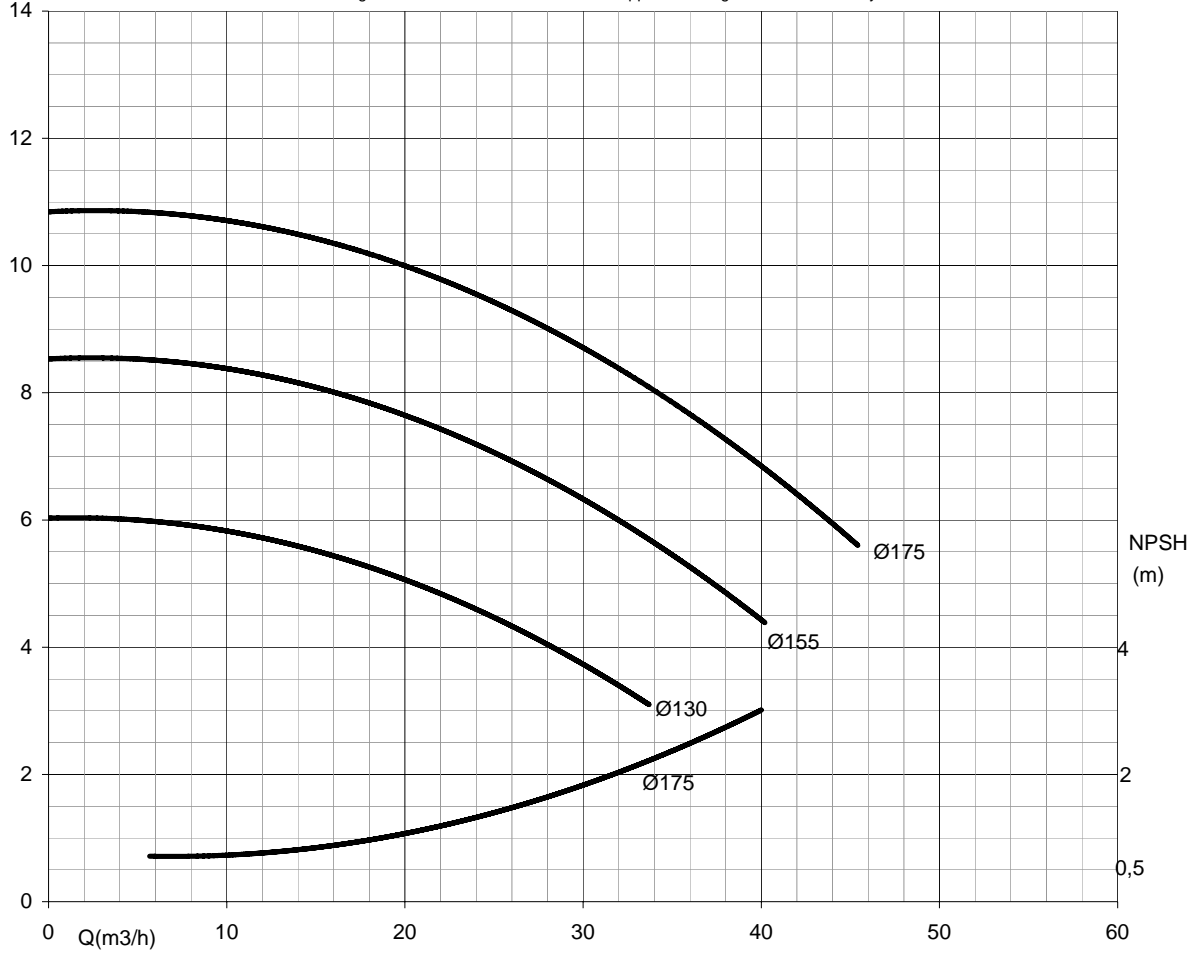

P (kW)

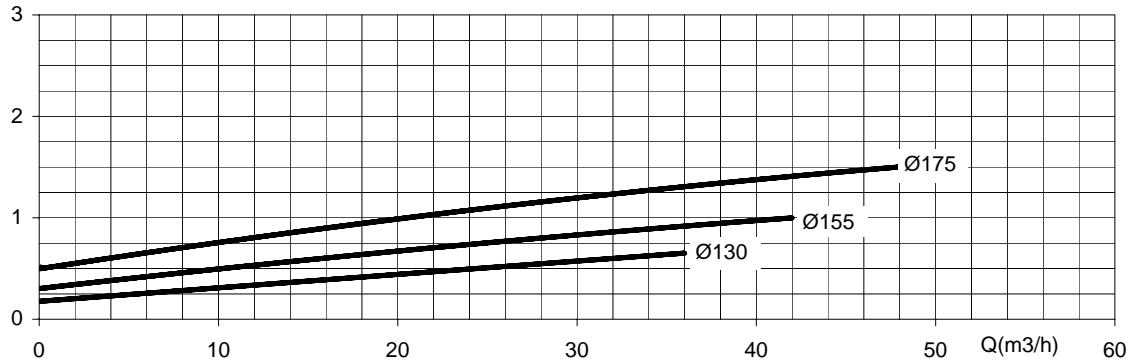


Model TRA 554LE-1450 RPM
80 mm Inlet x 65 mm Outlet


WRIGHT PUMP

H (m)

Performance curves based on tests using 20° C water. A tolerance of +/- 5% applies to all figures. Contact factory for different conditions.

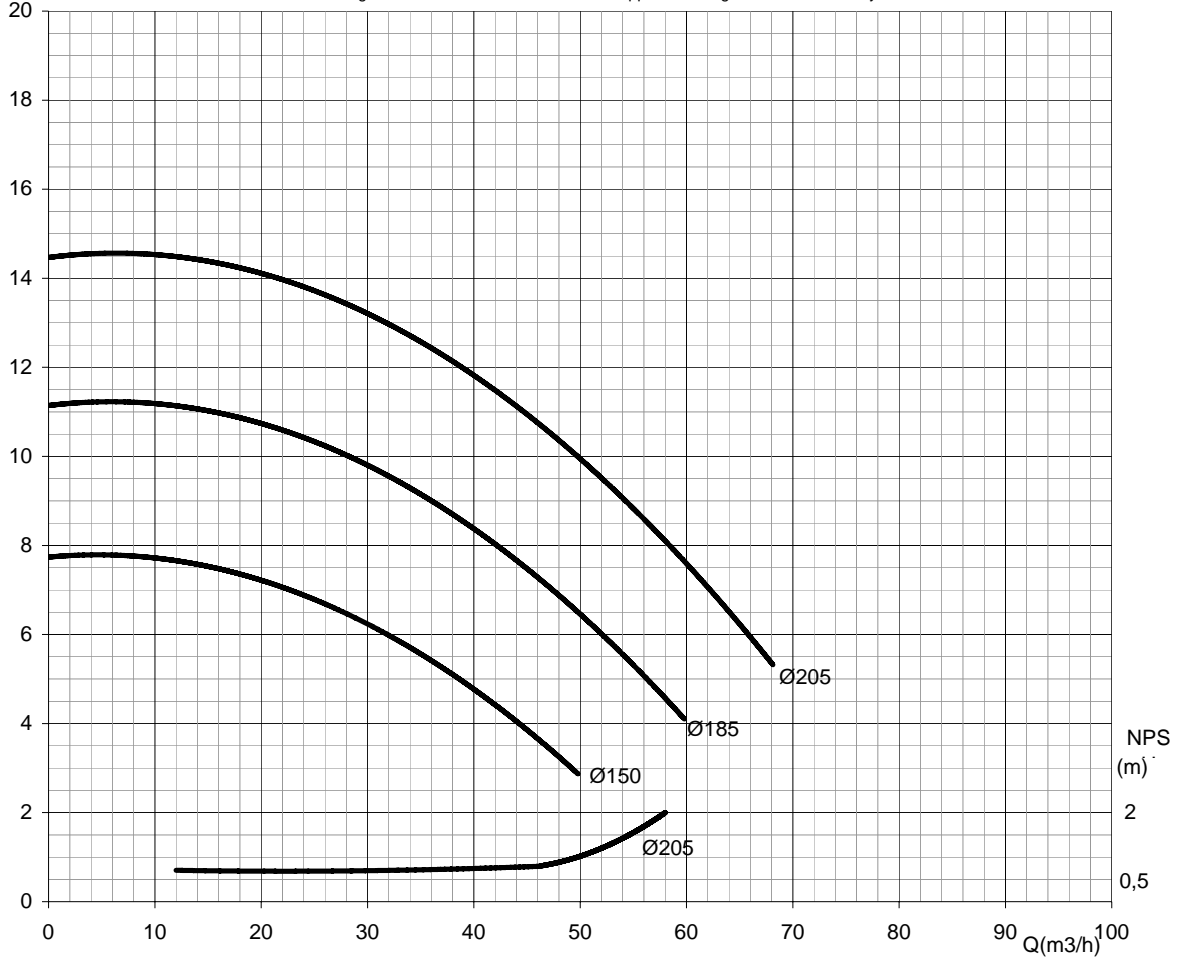

P (kW)

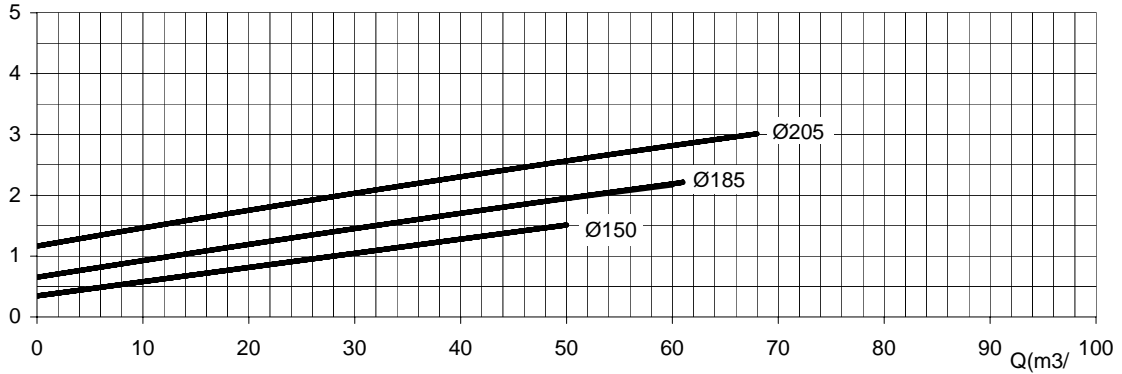


Model TRA 545LE-1450 RPM
85 mm Inlet x 50 mm Outlet


WRIGHT PUMP

H (m)

Performance curves based on tests using 20° C water. A tolerance of +/- 5% applies to all figures. Contact factory for different conditions.

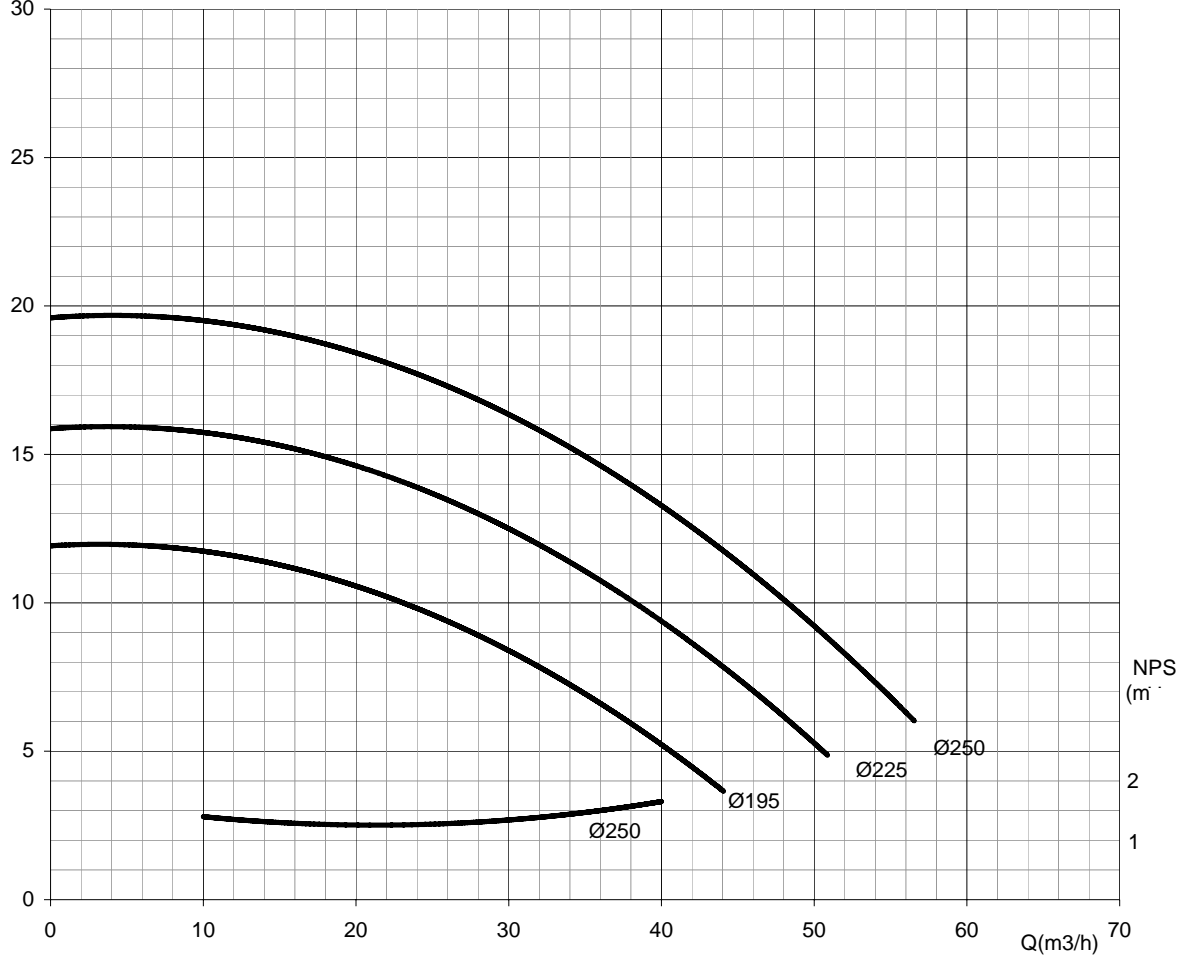

P (kW)

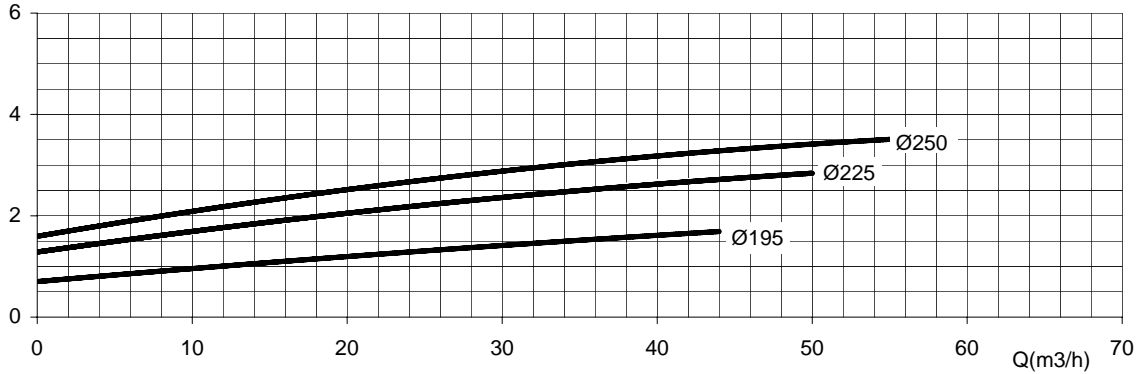


Model TRA 555LE-1450 RPM
85 mm Inlet x 65 mm Outlet


WRIGHT PUMP

H (m)

Performance curves based on tests using 20° C water. A tolerance of +/- 5% applies to all figures. Contact factory for different conditions.

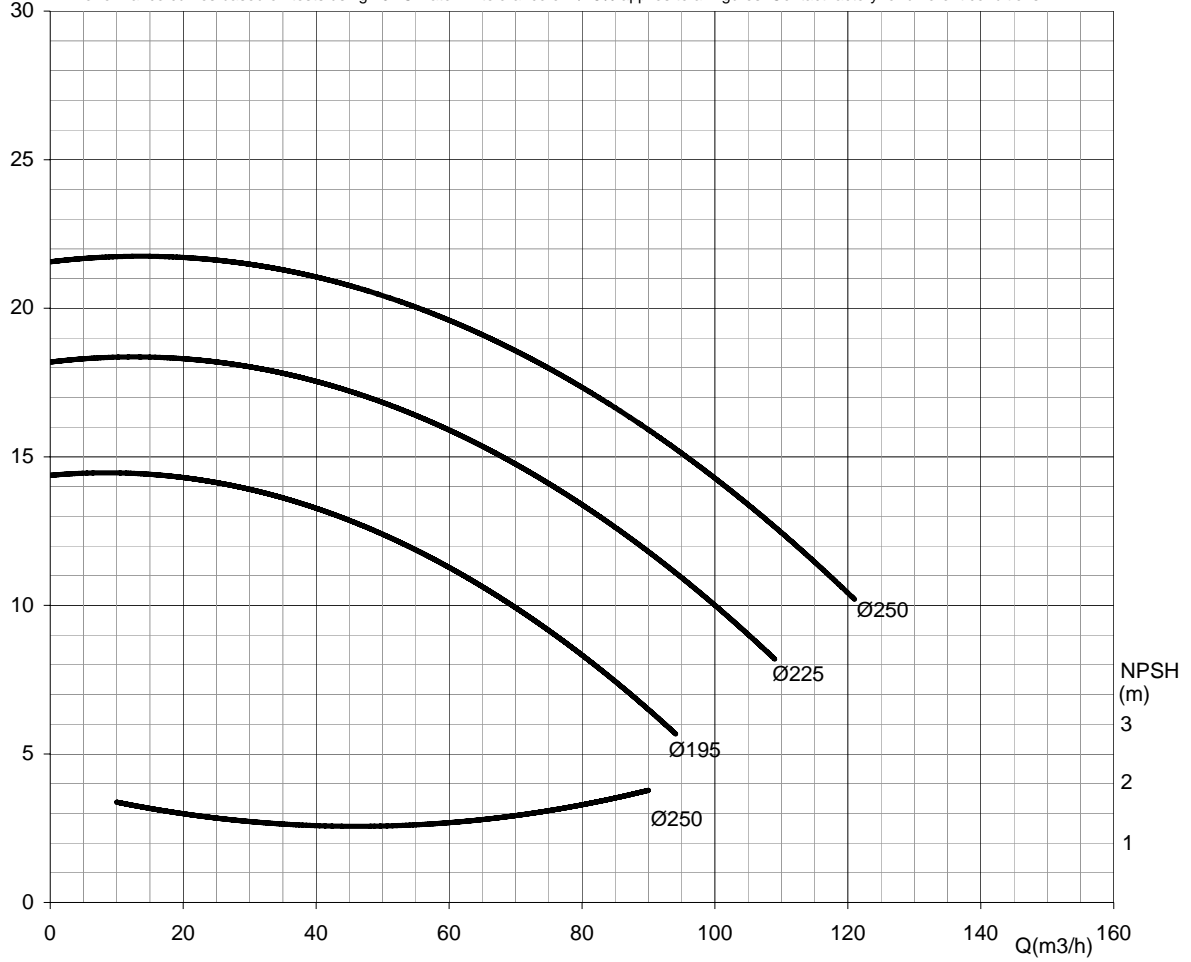


P (kW)

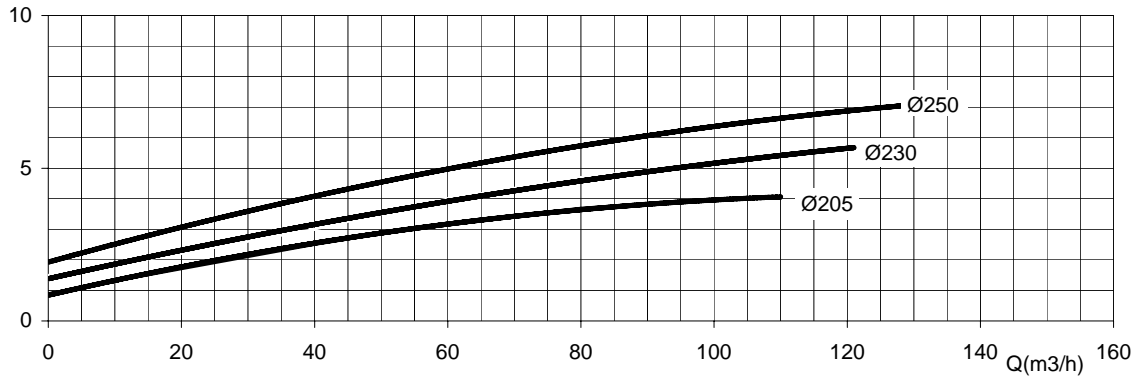


Model TRA 558LE-1450 RPM
100 mm Inlet x 100 mm Outlet ***WRIGHT PUMP***

H (m)

Performance curves based on tests using 20° C water. A tolerance of +/- 5% applies to all figures. Contact factory for different conditions.

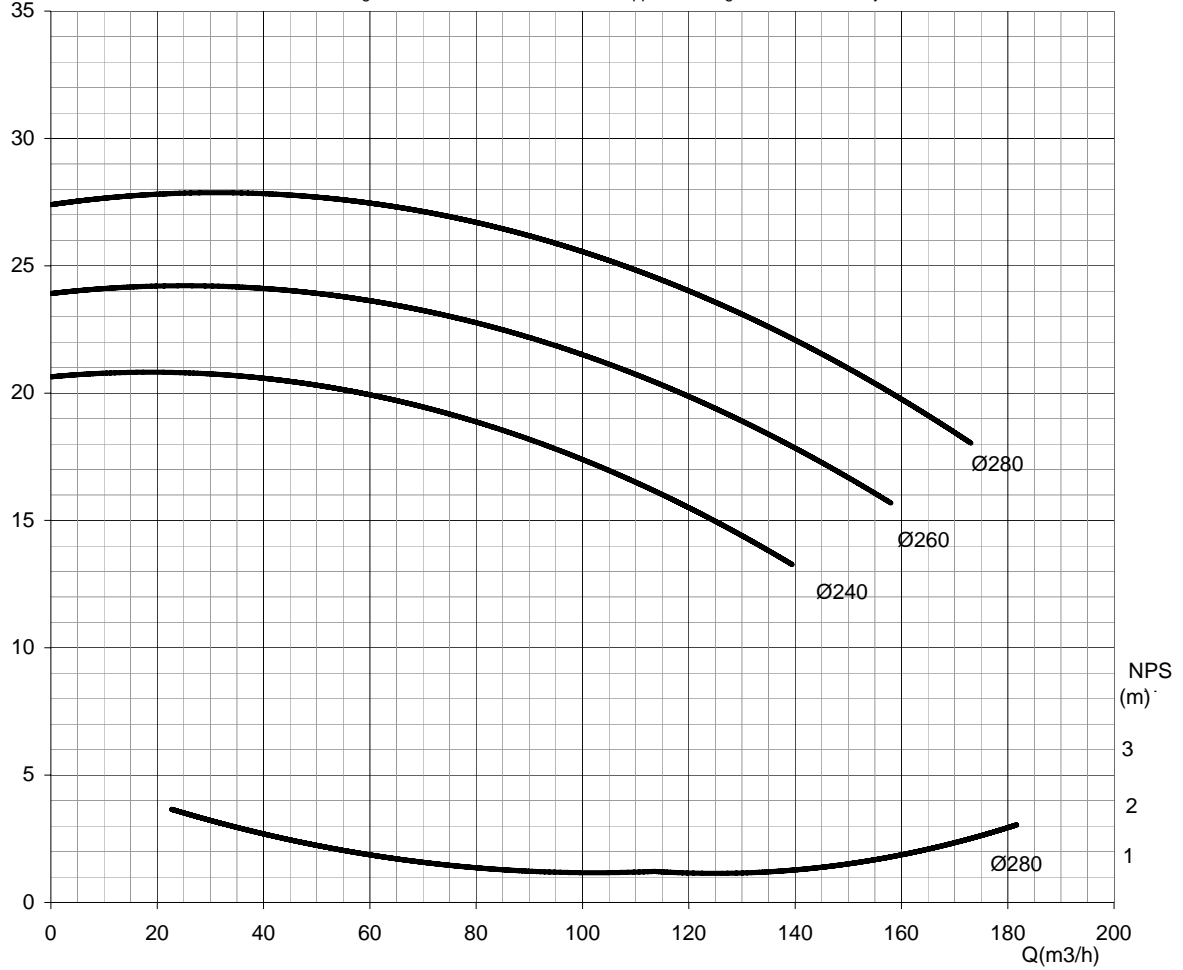

P (kW)

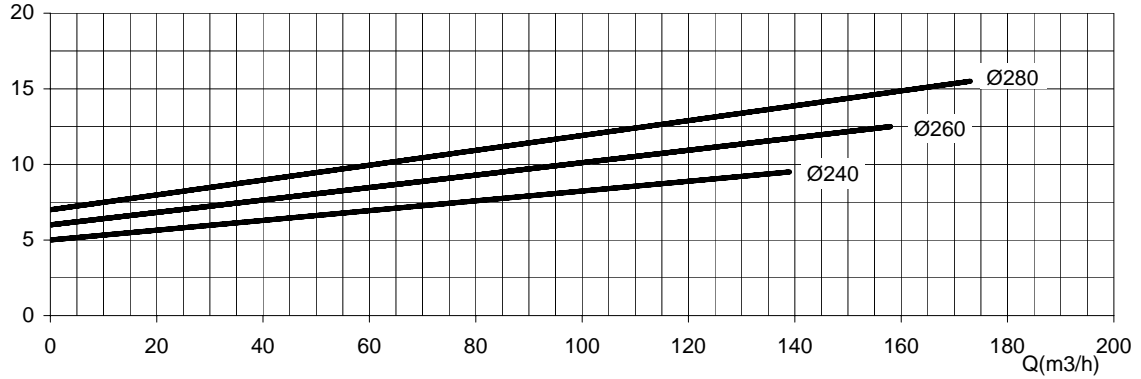

Model TRA 559LE-1450 RPM ***WRIGHT PUMP***
100 mm Inlet x 100 mm Outlet

H (m)

